


AK 4101/.. KD - 5,0 - slade grey




**1-n poles, Spacing 5,0 mm
insert required no. of poles ..**

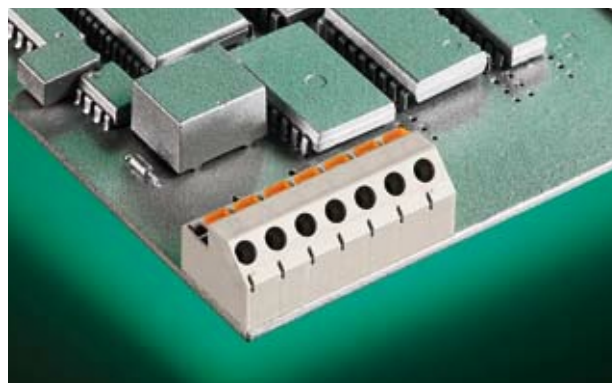

AKZ 4301/.. - KD - 5,08 - slade grey

**2-7 poles, Spacing 5,08 mm
insert required no. of poles ..**

Ratings:

			
	UL 1059	CSA 22.2 No. 158	EN 60998
Rated Voltage	300 V	300 V	250 V
Rated Current	10 A	10 A	17,5 A (T60)
Wire Size	AWG 20-14	AWG 20-14	1,5 mm ²
Test Voltage			2,0 kV

Max. Rated Cross Section

Single Wire (solid)	1,5 mm ²
Stranded Wire (flexible)	on request
Stranded wire with Ferrules	on request

Dimensions




Spacing	5,0 mm
PCB Hole Diameter	1,0 mm
Stripped Length	9,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Tension Spring	stainless steel
Wire Guard	Cu
Colour	
slade grey	RAL 7032

Ratings:

* Approval pending

			
	UL 1059	CSA 22.2 No. 158	EN 60998
Rated Voltage	300 V	300 V	250 V
Rated Current	16 A	16 A	17,5 A (T60)
Wire Size	AWG 22-15	AWG 22-15	1,5 mm ²
Test Voltage			2,0 kV

Max. Rated Cross Section

Single Wire (solid)	1,5 mm ²
Stranded Wire (flexible)	on request
Stranded wire with Ferrules	on request

Dimensions

Spacing	5,08 mm
PCB Hole Diameter	1,3 mm
Stripped Length	10,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Tension Spring	stainless steel
Wire Guard	Cu
Colour	
slade grey	RAL 7032