



### STL 132 VERTICAL

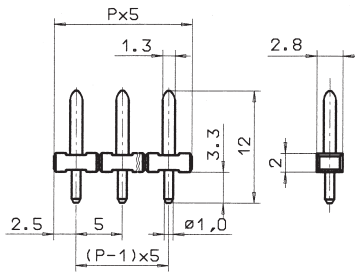


**P = No. of poles**

### STLZ 140 HORIZONTAL

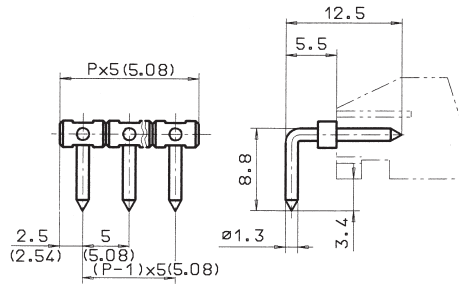


**P = No. of poles**

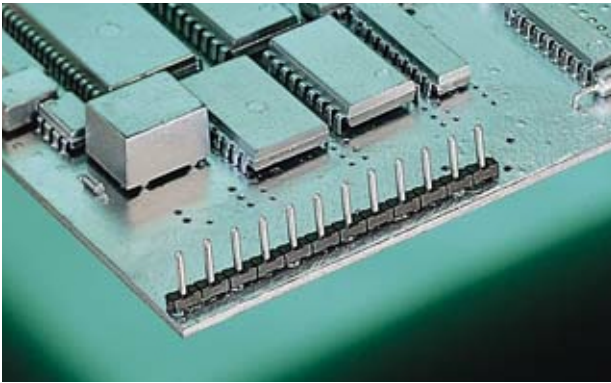

**STL 132/.. - 5,0 - V - black**

**2-24 poles, Spacing 5,0 mm  
insert required no. of poles ..**

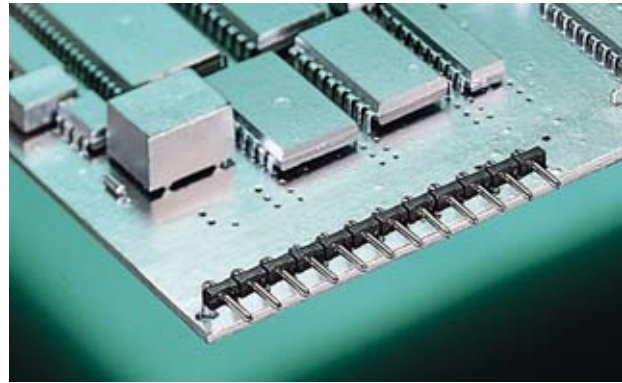

**STL(Z) 140/.. - 5,0 (5,08) - H - black**

**2-24 poles, Spacing 5,0 mm or 5,08 mm  
insert required no. of poles ..**

#### Ratings:

\* Approval pending



UL 1059

Rated Voltage 300 V

Rated Current 10 A

Rating Impulse Voltage/Dirt Level



CSA 22.2 No. 158

Rated Voltage 300 V

Rated Current 10 A

Rating Impulse Voltage/Dirt Level



DIN VDE 0627

Rated Voltage 250 V

Rated Current 10 A (T60)

Rating Impulse Voltage/Dirt Level 4 kV/3

#### Ratings:

\* Approval pending



UL 1059

Rated Voltage 300 V

Rated Current 10 A

Rating Impulse Voltage/Dirt Level



CSA 22.2 No. 158

Rated Voltage 300 V

Rated Current 10 A

Rating Impulse Voltage/Dirt Level



DIN VDE 0627

Rated Voltage 250 V

Rated Current 10 A (T60)

Rating Impulse Voltage/Dirt Level 4 kV/3

#### Dimensions

Spacing	5,0 mm
PCB Hole Diameter	1,2 mm

#### Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	CuZn

#### Colour

black	RAL 9011
-------	----------

#### Dimensions

Spacing	5,0 mm (5,08mm)
PCB Hole Diameter	1,5 mm

#### Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	CuZn

#### Colour

black	RAL 9011
-------	----------