


AK(Z) 1550/.. - 3,5 (3,81) - green




**2-20 (16) poles, Spacing 3,5 mm and 3,81 mm
insert required no. of poles ..**

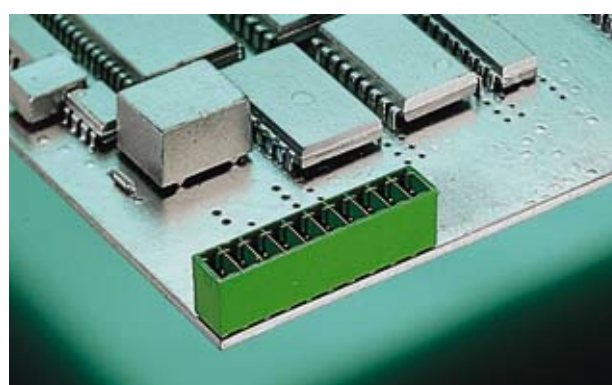

STL(Z) 1550/.. G - 3,5 (3,81) - V - green

**2-20 poles, Spacing 3,5 mm or 3,81 mm
insert required no. of poles ..**

Ratings:

			
	UL 1059	CSA 22.2 No. 158	DIN VDE 0627
Rated Voltage	300 V	300 V	160 V
Rated Current	8 A	8 A	9 A (T60)
Wire Size	AWG 28-16	AWG 28-16	1,5 mm ²
Rating Impulse Voltage/Dirt Level			4 kV/3
Rated Torque / Screw Size			0,4 Nm/M2
Max. Rated Cross Section			
Single Wire (solid)			1,5 mm ²
Stranded Wire (flexible)			1,0 mm ²
Stranded wire with Ferrules			1,0 mm ²




Dimensions

Spacing	3,5 mm (3,81 mm)
Stripped Length	7,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	RAL 6018
green	

Ratings:

			
	UL 1059	CSA 22.2 No. 158	DIN VDE 0627
Rated Voltage	300 V	300 V	160 V
Rated Current	8 A	8 A	9 A (T60)
Rating Impulse Voltage/Dirt Level			4 kV/3

Dimensions

Spacing	3,5 mm (3,81 mm)
PCB Hole Diameter	1,2 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu
Colour	RAL 6018
green	