



STL 132 VERTICAL

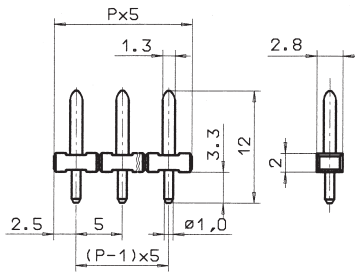


P = No. of poles

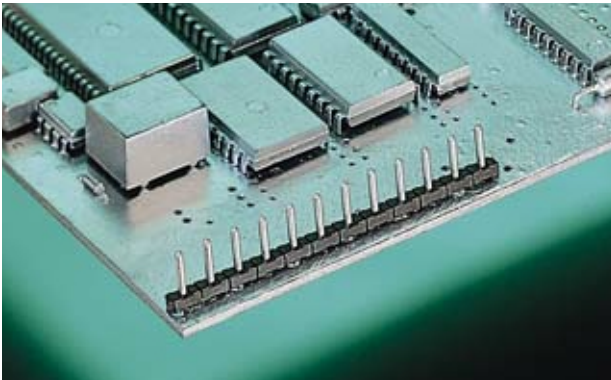


STL 132/.. - 5,0 - V - black

**2-24 poles, Spacing 5,0 mm
insert required no. of poles ..**

STLZ 140 HORIZONTAL

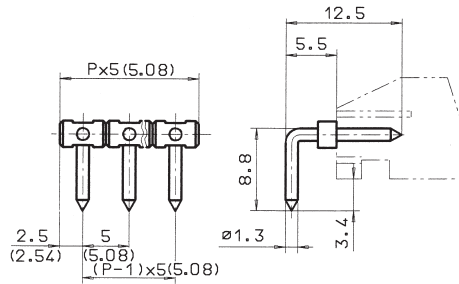

P = No. of poles

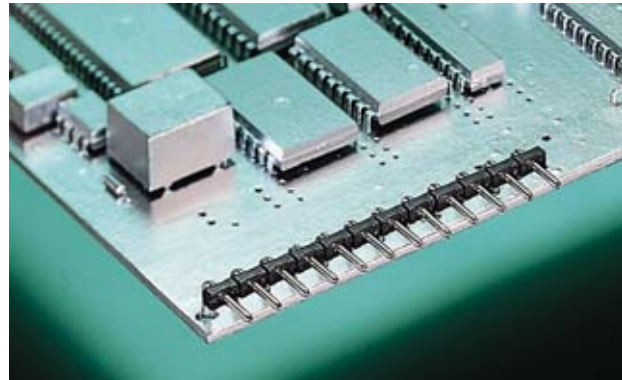

STL(Z) 140/.. - 5,0 (5,08) - H - black

**2-24 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..**

Ratings:

* Approval pending



UL 1059

Rated Voltage 300 V

Rated Current 10 A

Rating Impulse Voltage/Dirt Level



CSA 22.2 No. 158

Rated Voltage 300 V

Rated Current 10 A

Rating Impulse Voltage/Dirt Level



DIN VDE 0627

Rated Voltage 250 V

Rated Current 10 A (T60)

Rating Impulse Voltage/Dirt Level 4 kV/3

Ratings:

* Approval pending



UL 1059

Rated Voltage 300 V

Rated Current 10 A

Rating Impulse Voltage/Dirt Level



CSA 22.2 No. 158

Rated Voltage 300 V

Rated Current 10 A

Rating Impulse Voltage/Dirt Level



DIN VDE 0627

Rated Voltage 250 V

Rated Current 10 A (T60)

Rating Impulse Voltage/Dirt Level 4 kV/3

Dimensions

Spacing 5,0 mm
PCB Hole Diameter 1,2 mm

Materials

Insulating Material PA
Flammability Class UL94 V-0
Temperature Range -30°C/+105°C
Contact Pin CuZn

Colour

black RAL 9011

Dimensions

Spacing 5,0 mm (5,08mm)
PCB Hole Diameter 1,5 mm

Materials

Insulating Material PA
Flammability Class UL94 V-0
Temperature Range -30°C/+105°C
Contact Pin CuZn

Colour

black RAL 9011