

4-TERMINAL SURFACE MOUNT SF SERIES



FEATURES

- World's first 4-terminal SM resistor
- Excellent for current sensing applications
- Values as low as .001W, tolerances to ±0.01%
- Available on exclusive **SWIFT™** delivery program!
- Available in leaded versions
- Available on plastic Tape & Reel (SF-1 only)




Resistance	Available Tolerances	Temperature Coefficient
.001 - .0049	1% - 10%	1200ppm/°C Max.
.005 - .0099	.5% - 10%	600ppm/°C Max.
.01 - .024	.25% - 10%	200ppm/°C Max.
.025 - .049	.1% - 10%	150ppm/°C Max.
.05 - .099	.05 - 10%	90ppm/°C Max.
.1 - .99	.02% - 10%	50ppm/°C Max.
1Ω and above	.01% - 10%	20ppm/°C Max.

DIMENSIONS

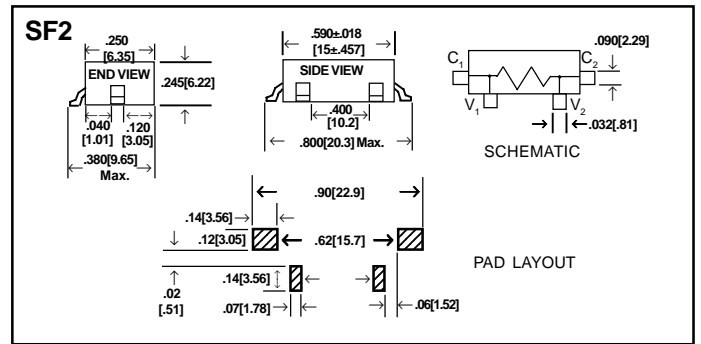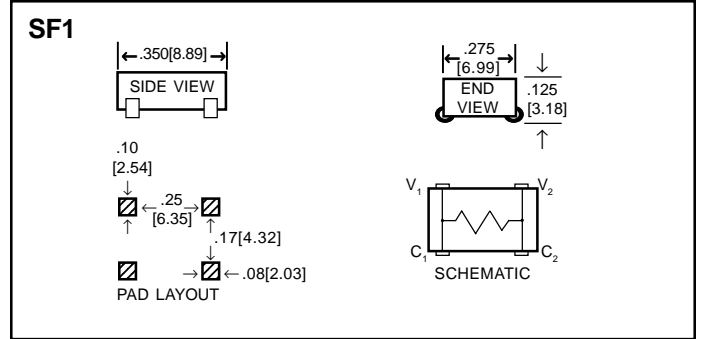

P/N DESIGNATION:

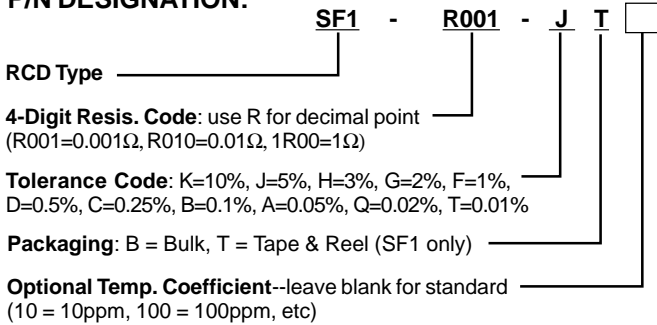

RCD Type	Wattage @ 25°C	Max. Current	Resistance Range
SF1	1.0	10A	.001 to 4K
SFG2	2.0	15A	.001 to 5K

Distributed by ARTLAND.
 TeL: 852-26900182 Fax: 852-26900213
 e-mail: sales@artland-tech.com
 www.artland-tech.com